


# INSTRUCTIONS FOR 31/1/00 SHOCK MOUNT LOAD CELL TO 31/0/00 STANDARD LOAD CELL




The following steps will require a medium sized phillips screwdriver a 9/16 inch and 10 mm closed end wrenches.

- 1) Remove all back panels.
- 2) Remove the circuit board cover and disconnect the 4 pin connector from the circuit board.
- 3) Remove and save the spacer and two 6mm bolts that mount the internal cylinder to the load cell using the 10mm closed end wrench.
- 4) Remove anti-rotation plate by sliding towards rear of unit.
- 5) Slide condenser mounting bracket and internal cylinder towards front of unit. Internal cylinder will rest on the condenser bracket.

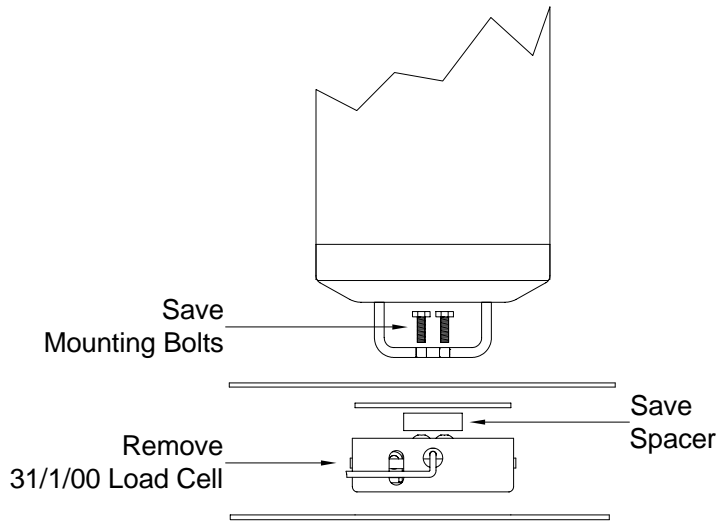

- 6) Remove and discard the four 1/4-20 bolts that mount the load cell to the center support plate using the 10mm closed end wrench.

- 7) Remove the load cell.
- 8) Secure the Replacement Load Cell Assy to the deck plate with the four supplied 1/4-20 bolts and the four 1/4-20 lock nuts.

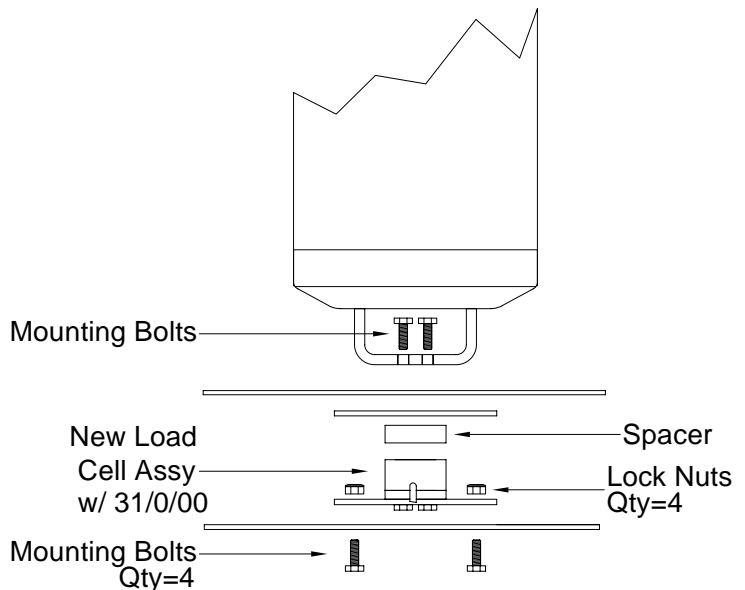

- 9) Secure the internal cylinder to the Replacement Load Cell Assy with the saved spacer and two 6mm bolts.
- 10) Connect the Replacement Load Cell Assy to the circuit board and replace the circuit board cover.
- 11) Calibrate and replace all panels.

RTI Technologies, Inc. - 10 Innovation Drive - York - PA 17402 - USA

Technical Support: 800-468-2321

560-80299-00