

FluidPRO™ BFX-2 Brake Flush System

Make brake flush service fast, simple and profitable with RTI's BFX-2. Automated push/pull process completely flushes the entire brake system and provides superior service.

Routine interval brake fluid exchanges are now being recommended by a growing number of OEM's and MAP (Motorist Assurance Program) and the efficient way to provide this service today is with the BFX-2

Efficient & Simple – 3 step process... extracts old brake fluid from master cylinder; fills new fluid into master cylinder; automatically performs OEM specified single sequential wheel end bleeding procedure all in less than 10 minutes



Wheel End Hose Connectors

- Color-coded, eliminates hook-up confusion

New Brake Fluid

- BFX-2 easily adapts to many types of brake fluid bottles
- May use RTI-supplied fluid tank

Waste Brake Fluid

- Sealable & EZ to remove waste bottle
- Eliminates mess during waste fluid disposal

BFX-2 Brake Flush System

P/N 425-80005-00

Easy Service to Sell – now specified by OEM's & MAP to maintain safe vehicle operation

User-Friendly Operation – universal master cylinder adapters w/ quick reference guide for EZ hook-up & includes pistol wand for convenient & accurate fill. EZ wheel end bleeder hose hook-up and storage


Effective and Professional – unique push/pull process ensures optimal fluid exchange, eliminates system contamination, purges harmful air simultaneously. Isolates each wheel end & performs OEM recommended bleeding sequences. Compatible with both ABS & non-ABS systems

Durable Design & Construction - Rugged cabinet w/ special powder coated steel to resist brake fluid corrosiveness



Control Panel

- Logical controls, intuitive layout & function
- Pressure gauge, assists in brake system diagnosis
- Automatic machine shut-off w/ warning light: new fluid tank is empty, used tank is full

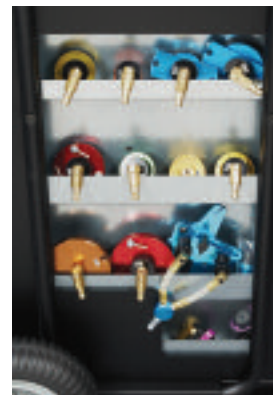

Adapters/Connectors

- Universal adapters for variety of master cylinders

Specifications

Electrical	12 VDC - 10 Amp
Pumps	Vacuum Pump: diaphragm 1.6 gal (6 liter) per minute Fill Pump: diaphragm 1.4 gal (5.3 liter) per minute
Fluid Tank Capacities	5 gal (19 liter) Used 1 gal (3.8 liter) New
Fluid Types	DOT 3 & DOT 4 Brake Fluid
Drain Hose	Black EPDM 1/4 in (0.6 cm), 12 ft (3.7 m) long
Vacuum Hoses	Black EPDM 3/16 in (0.5 cm) with 90° rubber connectors, 20 ft (6 m) rear (Qty: 2) and 12 ft (3.7 m) front (Qty: 2)
Fill Hose	Black EPDM 1/4 in (0.6 cm), 12 ft (3.7 m) long
Adapter Set	Contains universal adapters for master cylinders
Dimensions	49 in x 20 in x 22 in 125 cm x 41 cm x 56 cm (H x W x D)
Weight	120 lb (55 kg) with adapters
Warranty	1 Year Parts & Labor